



# MEMS Variable Optical Attenuator (VOA)

## WDL Spectrum

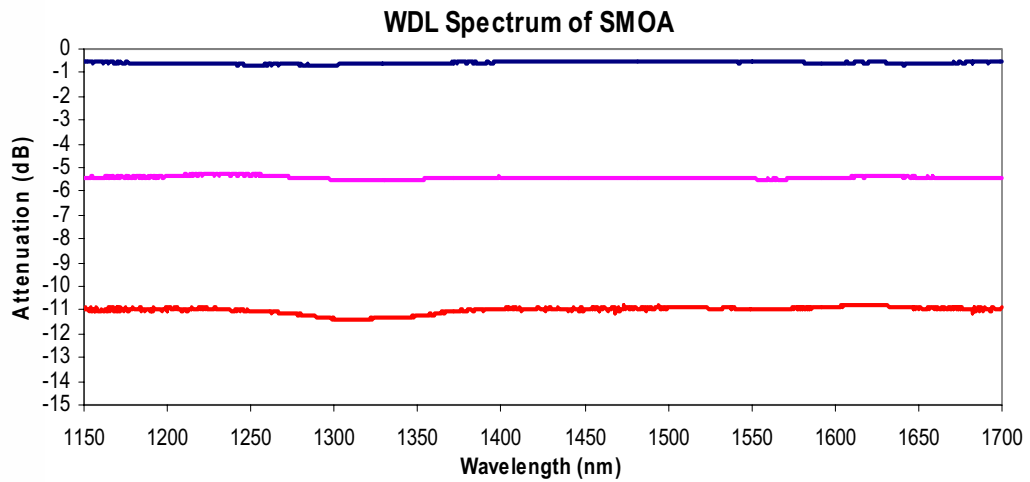

## Attenuation Response

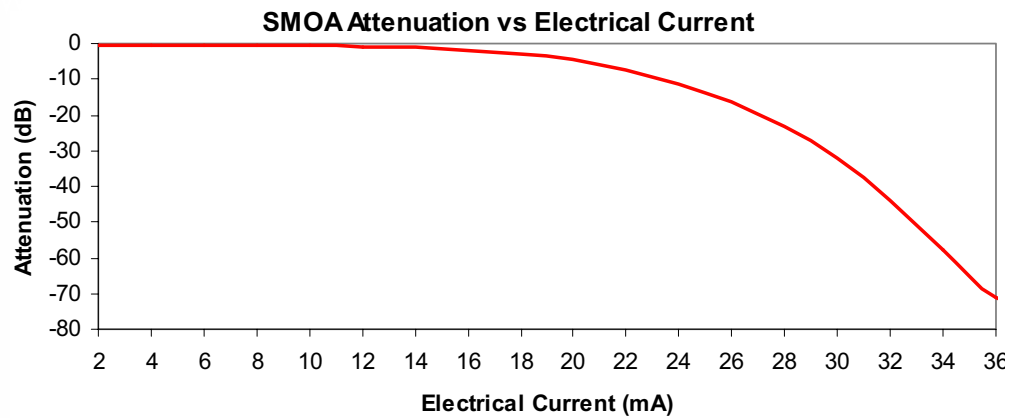

### Package Type 1 (Standard)

## Ordering Information

SMOA -	2 2	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
Type	Wavelength	Off State	Package Type	Fiber Type	Fiber Length	Connector			
Current Control=22	S+C+L=1 1310=3 1550=5 1310&1550=2 Special=0	Normally transparent=1 Normally opaque=2	Standard=1 Special=0	SMF-28=1 Special=0	Bare fiber=1 900um loose tube=3 Special=0	0.25m=1 0.5m=2 1.0 m=3 Special=0	None=1 FC/PC=2 FC/APC=3 SC/PC=4 SC/APC=5 ST/PC=6 LC=7 Special=0		

