


## SAM™ Data Sheet SAM-1550-50-10ps-x, $\lambda = 1550$ nm

Laser wavelength	$\lambda = 1550$ nm
High reflection band (R > 55%)	$\lambda = 1460 \dots 1600$ nm
Absorbance	$A_0 = 50$ %
Modulation depth	$\Delta R = 30$ %
Non-saturable loss	$A_{ns} = 20$ %
Saturation fluence	$\Phi_{sat} = 70$ $\mu\text{J}/\text{cm}^2$
Relaxation time constant	$\tau \sim 10$ ps
Damage threshold	400 MW/cm <sup>2</sup>
Chip area	4mm x 4mm; other dimensions on request
Chip thickness	400 $\mu\text{m}$ ; optional: 150 $\mu\text{m}$ on request
Protection	the SAM is protected with a dielectric front layer
Mounting option <b>x</b> denotes the type of mounting as follows:	
<b>x</b> = 0	unmounted
<b>x</b> = 12.7 g	glued on a gold plated Cu-cylinder with 12.7 mm $\varnothing$
<b>x</b> = 25.4 g	glued on a gold plated Cu-cylinder with 25.4 mm $\varnothing$
<b>x</b> = 12.7 s	soldered on a gold plated Cu-cylinder with 12.7 mm $\varnothing$
<b>x</b> = 25.4 s	soldered on a gold plated Cu-cylinder with 25.4 mm $\varnothing$
<b>x</b> = FC	mounted on a 1 m monomode fiber cable with FC connector

### Low intensity spectral reflectance and dispersion coefficient $D_2$

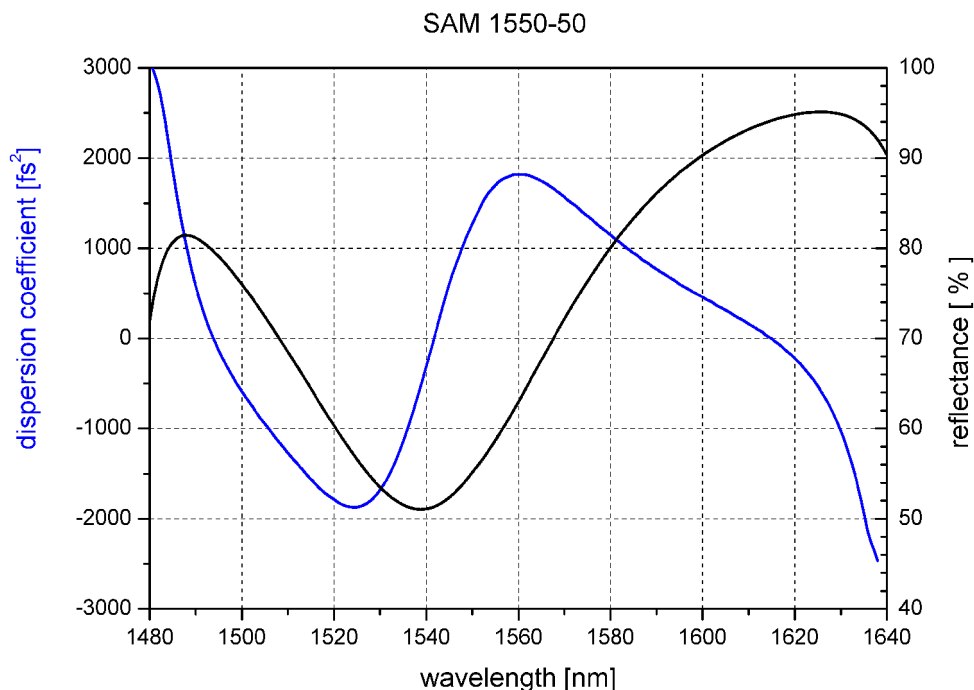

---

## Group Delay Dispersion (GDD)

Dispersion coefficient  $D_2(\omega) = \frac{\partial^2 \varphi}{\partial \omega^2}$

with  $\varphi$  - reflected phase

$$\omega = 2\pi \frac{c}{\lambda} \text{ - angular frequency}$$